


BORA LED 037A-L02D1A-30 Recessed floor BORA LED IP67 LED SMD 3W 330lm CRI80 4000K 26° Stainless steel

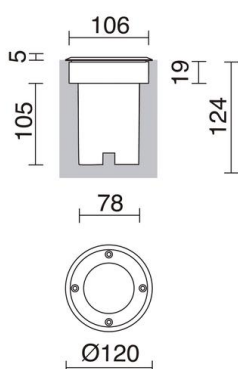

Familia de empotrables de suelo apta para uso exterior Bora, cumpliendo con un grado de protección IP67, se presenta con un aro exterior en acero inoxidable. Diseñado para alojar lámparas GU10 LED incluye dos salidas de cables para facilitar la instalación pasante, pudiéndose encontrar en una versión con lámpara fija con aro exterior redondo o cuadrado y en una versión orientable con aro redondo. Son luminarias diseñadas para iluminar las zonas de paso en los espacios exteriores.

GENERAL DATA

Category	Recessed
Family	Bora Led
Finish	[30] Stainless steel
Location	Outdoor
Installation	Floor
Body material	Aluminum
Diffuser material	Transparent glass
Frame material	Inox aisi 316
ETIM class	EC000758
EAN	8435256535303

LIGHT SOURCES AND BEAMS

Sources	LED SMD 3W max. 330lm 4000K CRI80
Total flux	282 lm
Energy efficiency	F
Beam	26° - Direct symmetric

TECHNICAL DATA

Dimensions	Diameter x Height x Depth (mm): 120 x 5 x 124
IP	IP67
IK	08
Static pressure	500.0 Kg
Protection class	Class I
Frequency	50/60 Hz
Input voltage	110-240V AC V
Output current	350 mA
Power factor	0.5
Auxiliary gear	Electronic
Surface temperature	45.0 °C
Lifetime	27.000 h
LED lifetime L	80
LED lifetime B	50
Weight	0.875 Kg
Cable outlets	2
Lead wire length	200.0 mm
Cut hole box included	Yes
Cut hole dimensions	Diameter x Depth (mm): 106 x 124
ECORAE category I	LED-B
ECORAE I	0.5
Periodic maintenance	Yes
Flammable surfaces	Yes