
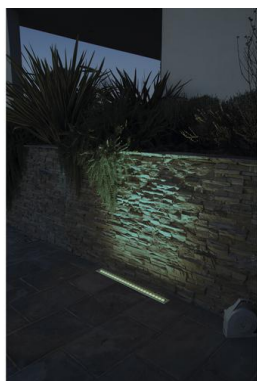
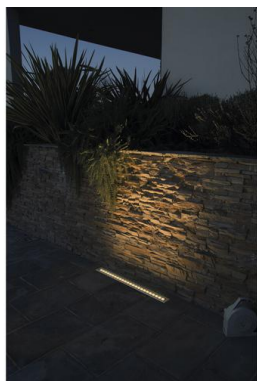


WALK 920O-L1480F-30 Recessed floor WALK IP67 DMX LED SMD RGBW 48W 6600lm CRI80 24° Stainless steel

La familia Walk consiste en empotrables de suelo y proyectores de superficie fabricada de aluminio y cuenta con IP67. Está disponible en varias temperaturas de color y versión RGB, diferentes tipos de potencia max. hasta 80W. Gracias a su versatilidad es ideal para instalaciones en espacios exteriores.



GENERAL DATA

Category	Recessed
Family	Walk
Finish	[30] Stainless steel
Location	Outdoor
Installation	Floor
Body material	Aluminum
Diffuser material	Transparent glass
Frame material	Stainless steel
ETIM class	EC000758
EAN	8433264104870

LIGHT SOURCES AND BEAMS

Sources	LED SMD RGBW 48W max. 6600lm CRI80
Total flux	5680 lm
Energy efficiency	D
Beam	24° - Direct symmetric

TECHNICAL DATA

Dimensions	Length x Width x Height (mm): 1180 x 98 x 83
IP	IP67
IK	09
Static pressure	500.0 Kg
Dinamic pressure	500.0 Kg
Protection class	Class I
Frequency	50/60 Hz
Dimmable	DMX
Input voltage	24V DC V
Output current	500 mA
Power factor	0.9
Operating temperature range	20 - 50 °C
Lifetime	50,000 h
LED lifetime L	80
LED lifetime B	10
Cable outlets	1
Lead wire length	0.5 mm
Cut hole box included	Yes
Cut hole dimensions	Length x Width x Depth (mm): 1170 x 100 x 85
ECORAE category I	LED-B

NOTES

LED blanco 6500k

WALK

920O-L1480F-30 Recessed floor WALK IP67 DMX LED SMD RGBW 48W 6600lm CRI80 24°
Stainless steel

PRODUCTS OF THE SAME FAMILY



Walk Flood
L1146



Walk Flood
L586



Walk Reces
L620



Walk Reces
Mat L1180



Walk Reces Mat L620