




01.MAKE HOLE PATTERN
 02.SWITCH OFF MAIN
 03.CONNECT POWER-SUPPLY TO THE MAIN
 04.CONNECT LAMP TO POWER SUPPLY
 05.HOLD SPRINGS
 06.PUT LAMP INTO CEILING
 07.SWITCH ON THE MAIN AND LIGHT ON

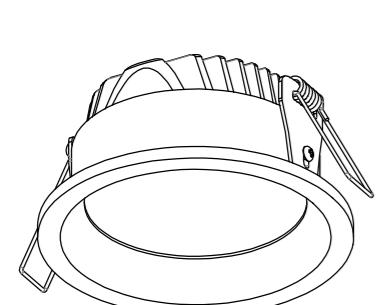

DC931A
D105x59mm
6W 3"

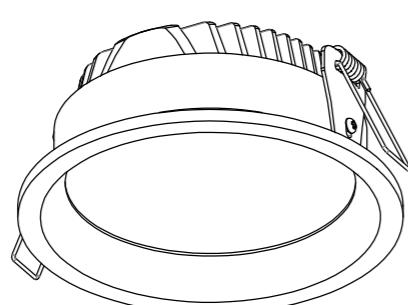

DC932A
D128x59mm
10W 4"

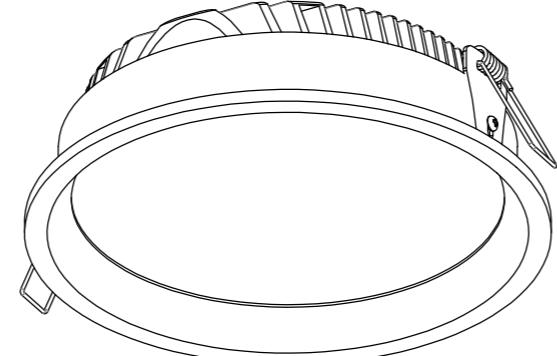

DC934A
D175x59mm
20W 6"

Lamp:SMD-2835 LED
 Color: 2700K/3000K/4000K/6000K
 Color rendering: Ra80
 Input: 220V-240V AC
 Current: Constant 300mA
 Frequency: 50/60Hz
 Watt: 6W/10W/20W
 Life span: 20,000hrs
 Operating temp: -20°C--+40°C
 Indoor use only
 IP20
 Dimmable: NO

Cautions: a.Installed by qualified electrician
 b.Use only power-supply supplied
 by manufacturer for products guarantee