




|                        |           |
|------------------------|-----------|
| Mounting               | Floor     |
| Voltage (V)            | 100V-240V |
| Hertz                  | 50/60Hz   |
| Class                  | II        |
| IP                     | 20        |
| Power (W)              | 15        |
| Light source           | E14 LED   |
| Light source included  | No        |
| Bulb format            | G45       |
| Number of lamp holders | 1         |
| Dimmable luminaire (W) | No        |
| Rotation angles 2      | 360       |
| Switch type            | On/Off    |
| Cable length           | 2500 mm   |
| Structure material     | Steel     |
| Shade material         | Steel     |
| Structure finish       | Black     |
| RAL/Pantone structure  | RAL 9011  |
| Shade finish           | Black     |

 [Installation instructions](#)

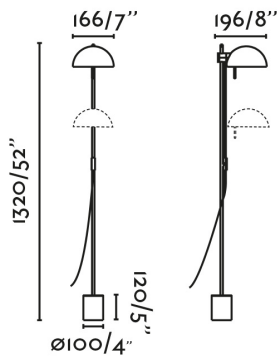

Recommended bulbs



|                       |           |
|-----------------------|-----------|
| G45 LED               |           |
| Reference             | 17461     |
| Voltage (V)           | 220V-240V |
| Hertz                 | 50/60Hz   |
| Power (W)             | 4         |
| Luminous Flux (lm)    | 390       |
| Color temperature (K) | 2700K     |

Related accessories



|                                  |       |
|----------------------------------|-------|
| Tider Cable Management Accessory |       |
| Reference                        | 20546 |
| Structure material               | TPU   |

