

TM TECHNOLOGIE
emergency & evacuation lighting
TM.ONTEC G
TM.ONTEC G 30



IP 20



1h/3h

8h


850 °C





210 ÷ 250 V AC
50 / 60 Hz
186 ÷ 254 V DC
20 ÷ 57 V DC





A, B

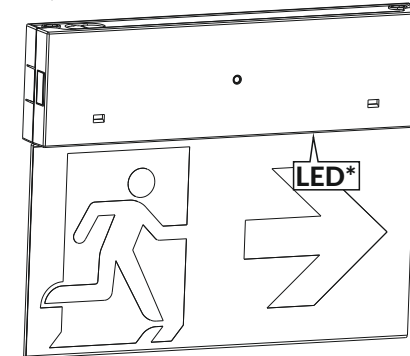

C

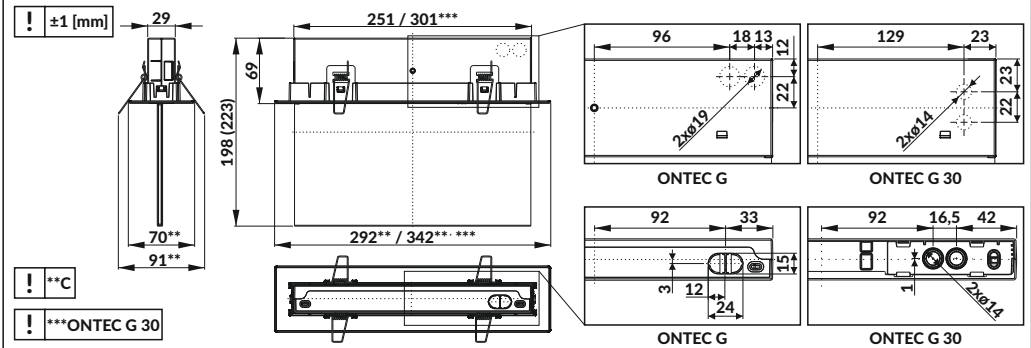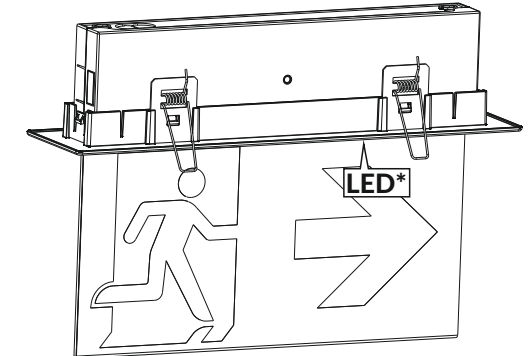

1

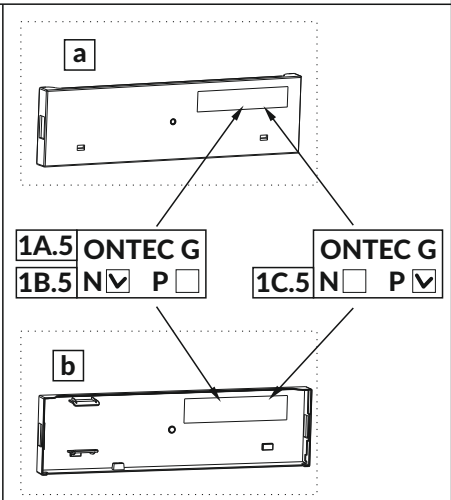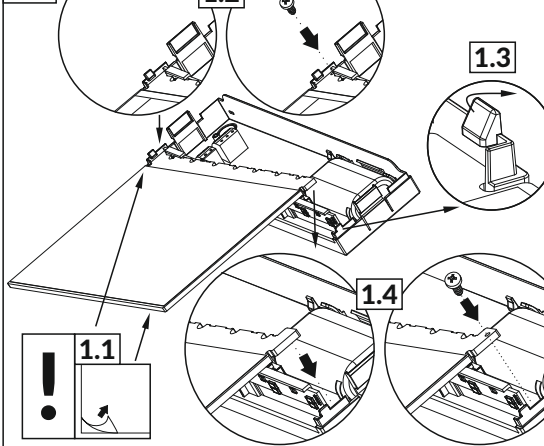

3.12 1.2 → 1.3 → 1.4


3.13 1.8a*(1.8b*) → 1.10

4


*ST / AT / DT / D2 / D3 / D2R / D3R / DA / DL

4.1 3.1 → 3.2 → 3.3a*(3.3b*)



LiFePO4/C



4.3



4.4




4.5


Ni-Cd HT 3.6V/0.8Ah

4.3

4.2




4.6




4.5

4.7 1.8a*(1.8b*) → 1.10


ONTEC G E1B / E1E / E1P

t_c 95°C


ONTEC G E1A / E1U

t_c 80°C


ONTEC G CBA

t_c 95°C

ONTEC G CB 24/48, CBM 48

t_c 85°C

ONTEC G DL / DB RADIO

t_c 85°C

ONTEC G CBA CB+, CBM

t_c 65°C 80°C