

Flo T 300

LL1340162

Lombardo.



Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Material:	Aluminium
Finish:	White RAL 9003
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	30
Lumen:	2800
Real Lumen:	2136
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	22-27-32-41
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 20
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA



Flo T 300

LL1340162

Lombardo.



Installation images:




Flo T 300

LL1340162


Lombardo.

Lighting simulation:

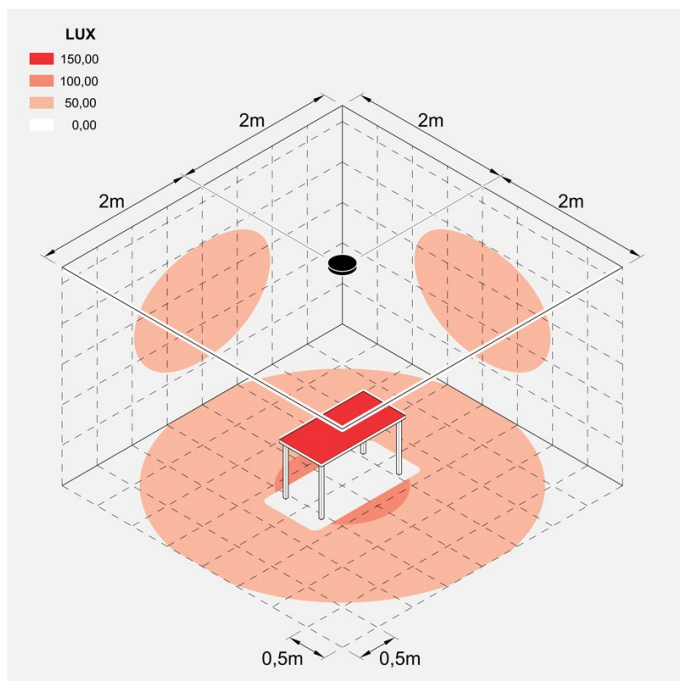

flo_t_300

Photometric curves:

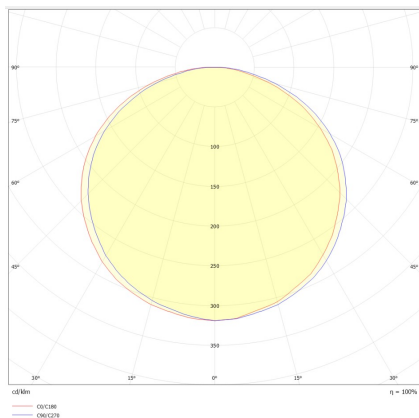

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it