


Mounting	Table
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	12
Energy class light source	D
Light source	SMD LED
Luminous Flux (lm)	677
Color temperature (K)	2700K
Dimmable luminaire (W)	Yes
CRI	>80
Switch type	Potentiometer
Cable length	2000 mm
Structure material	Steel
Diffuser material	PC
Structure finish	Gloss Garnet
RAL/Pantone structure	RAL 3004
Diffuser finish	Opal

↓ Installation instructions

↓ Energy label

↓ Photometric

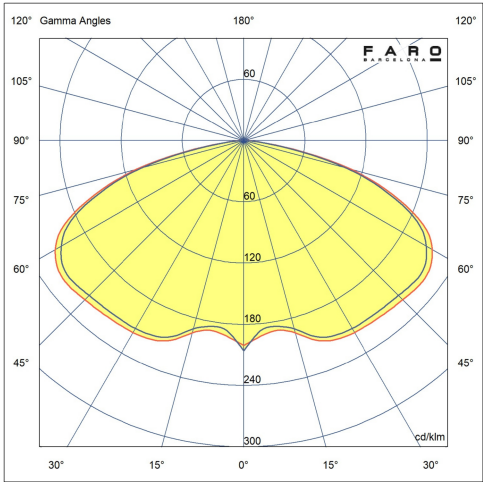

Related accessories



Tider Cable Management Accessory	
Reference	20546
Structure material	TPU



