


IK05 IP65 III



Mounting	Floor
Voltage (V)	24VDC
Class	III
IP	65
IK	05
Power (W)	3
Energy class light source	G
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	154
Color temperature (K)	2700K
Dimmable luminaire (W)	No
CRI	>90
Suitable for seaside areas	No
Driver included	No
Recommended driver On/Off	98324031
Luminaires per On/Off driver	De 1 a 10
Recommended DALI driver	98324101
Luminaires per DALI driver	De 1 a 25
Recommended CASAMBI driver	98324599
Luminaires per CASAMBI driver	De 1 a 30
Cable length	500 mm
Structure material	Stainless Steel
Diffuser material	Glass
Structure finish	Black
Diffuser finish	Opal
<a href="#"> Installation instructions</a>	
<a href="#"> Energy label</a>	
<a href="#"> Photometric</a>	

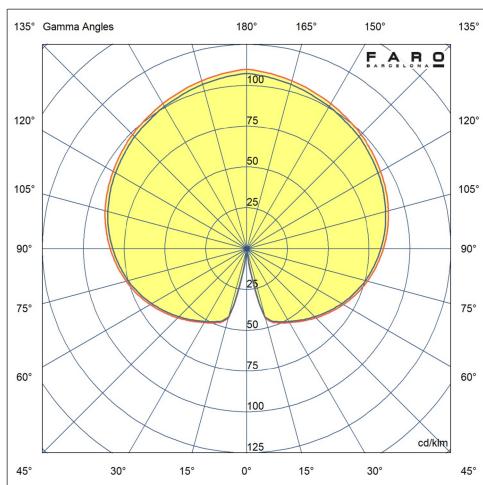

Document generated on 03/02/2026

**Recommended Drivers**



**Power Supply 24Vdc 30W IP67**

Reference	98324031
Voltage (V)	24VDC
IP	67
Power (W)	30
Control System	on/off



**Fuente Alimentación**

Reference	98324101
Voltage (V)	100V-240V
Control System	Dali

**Power Supply 24VDC 120W 5A CASAMBI**

Reference	98324599
Voltage (V)	24VDC
IP	20
Power (W)	120
Control System	Casambi



Document generated on 03/02/2026