


IK05 IP65

Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	65
IK	04
Power (W)	3
Energy class light source	E
Light source	LED MODULE
Luminous Flux (lm)	214,7
Color temperature (K)	3000K
Dimmable luminaire (W)	No
Light orientation	Indirect lighting
CRI	>80
Suitable for seaside areas	No
Control System	On/off
Driver included	Yes
Structure material	Concrete
Diffuser material	Glass
Structure finish	Grey
Diffuser finish	Translucent


Installation instructions

Energy label

Photometric

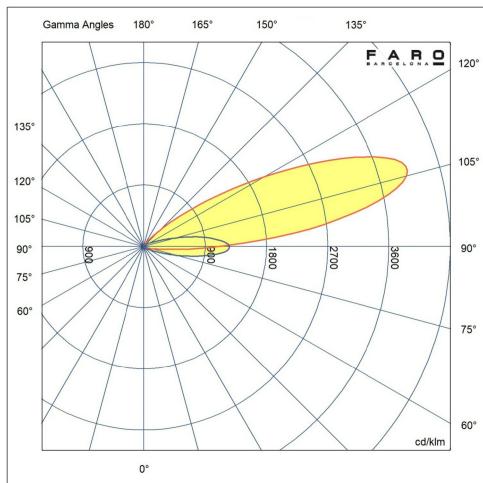

Document generated on 04/02/2026

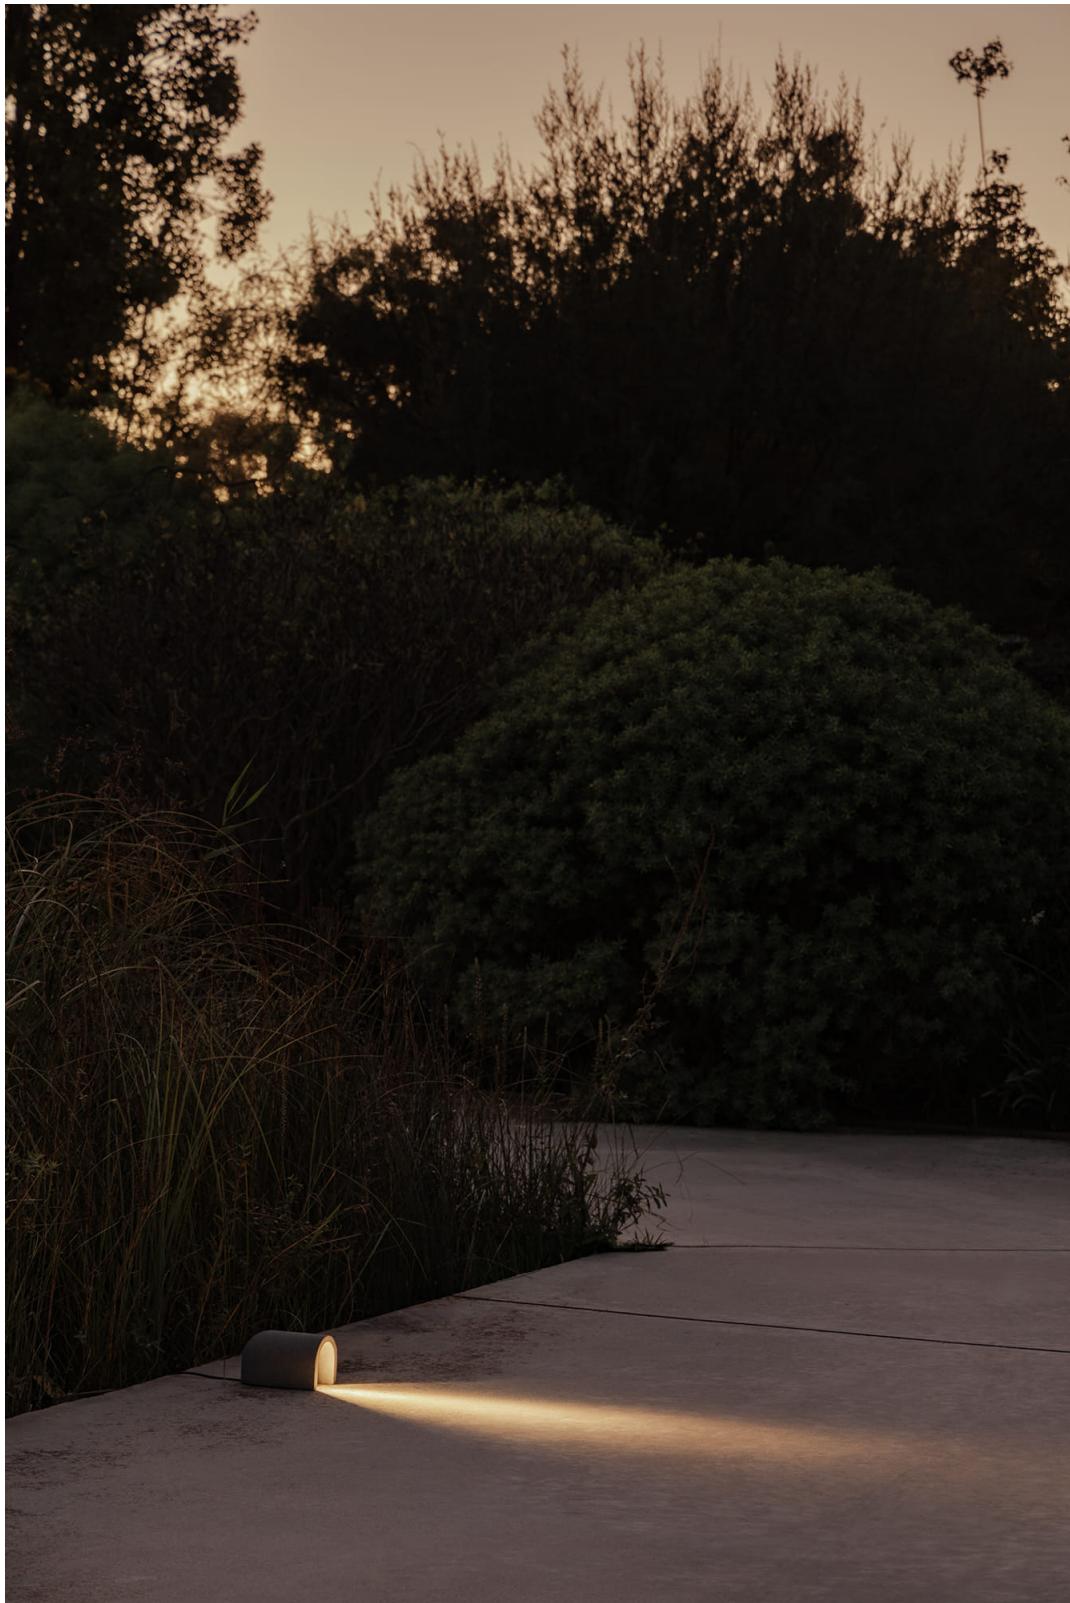

Document generated on 04/02/2026