

# FLOS

F0303000 Steel

## Arco Led

Designed by Achille and Pier Giacomo Castiglioni, 1962

28W - 1224lm - 2700K

Floor lamp providing direct light. White Carrara marble base. Satin-finish stainless steel telescopic stem. Pressed, polished and zapon-varnished aluminum swiveling and height-adjustable reflector.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607000991
Mounting	Floor
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Power (W)	28
System flux (lm)	1224

### Physical

Colour	Steel
Length (mm)	2200
Cord colour	Black
Cord length (mm)	2300
Net weight (kg)	63.85
Package volume (m <sup>3</sup> )	0.24
IP internal	20

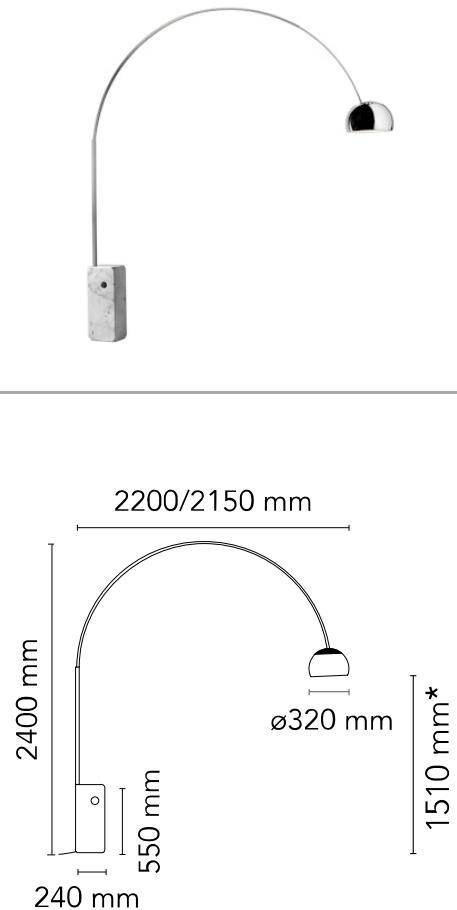

\*The diffuser can be adjusted to 1700 mm or 1850 mm.

### Download


Mounting instructions	<a href="#">PDF</a>
Mounting instructions	<a href="#">PDF</a>
Mounting instructions	<a href="#">PDF</a>

### Photometric Files


LDT / IES	<a href="#">LDT</a>
-----------	---------------------

### Technical Drawings

2D	<a href="#">ZIP</a>
3D	<a href="#">ZIP</a>
Bim	<a href="#">ZIP</a>



## Schematic light drawing



## Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
Extreme cut off	No


## Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

## Ecodesign and Energy

### Labelling

This product contains a light source of energy efficiency class **D**




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

## Spare Parts

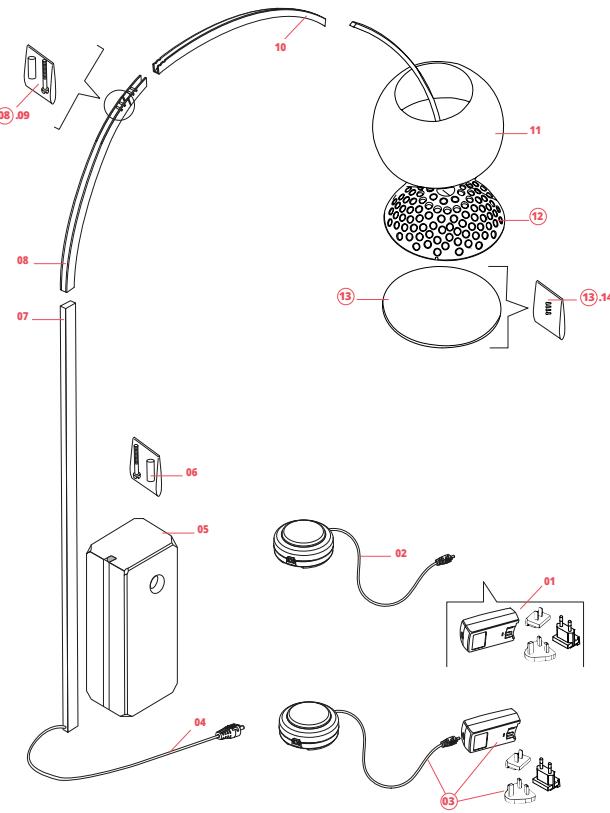

01. Black plug assembly kit & 48V driver	RF6600130
02. Arco Led Switch dimmer 600mA for new version	RF26383
03. Arco Led Switch dimmer 400mA assembly for old version	RF0303600
04. Arco Led Middle electric cable with connectors	RF20805
05. Marble base	F0310000
06. Fixing screw with joint	RF0300100
07. Inox stem	RF21041
08. Long inox channel	RF02970
09. Pins and screw set	RF0300200
10. Medium inox channel	RF02971
11. Polished reflector	RF00797
12. Arco Led Small inox channel with grid and led	RF0303400
13. Arco Led Optical led diffuser with fixing screws	RF0303200
14. Arco Led Optical led diffuser fixing screws	RF0303300



RF6600130

Black plug assembly kit & 48V driver



RF26383

Arco Led Switch dimmer 600Ma for new version



RF0303600

Arco Led Switch dimmer 400mA assembly for old version



RF20805

Arco Led Middle electric cable with connectors



F0310000

Marble base



RF0300100

Fixing screw with joint



RF21041

Inox stem



RF02970

Long inox channel



RF0300200

Pins and screw set



RF02971

Medium inox channel



RF00797

Polished reflector



RF0303400

Arco Led Small inox channel with grid and led



RF0303200

Arco Led Optical led diffuser with fixing screws

RF0303300

Arco Led Optical led diffuser fixing screws