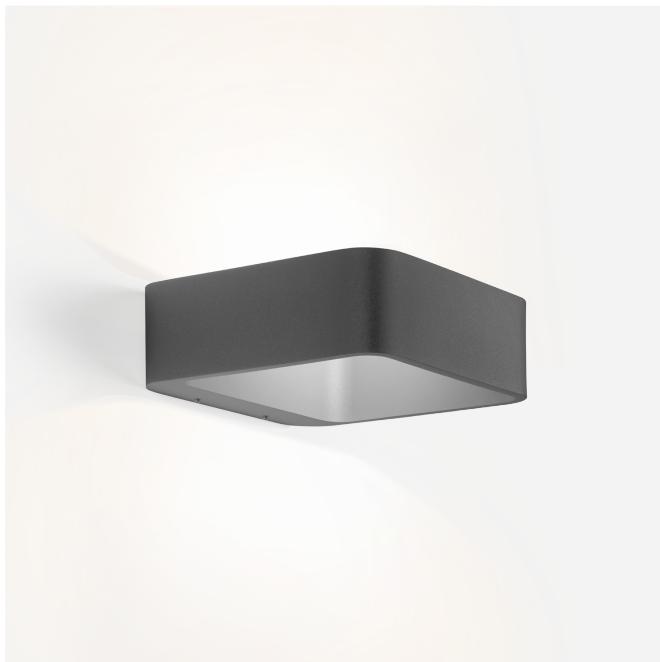




PROJECT
TYPE
NOTES
QUANTITY
DATE

IP65


Rectangular wall surface luminaire made from aluminium; rounded edges; surface Anthracite Grey; powder coated; matt texture; RAL 7016; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP65; Class 1; driver included; light source not replaceable; control gear replaceable by end-user;

GENERAL

Wall
Surface
Anthracite Grey
RAL 7016 ^a
IP65
Exterior
425 lm
CIE flux code: 12 45 84 50 100

LIGHT DISTRIBUTION

LED

3000 K
CRI ≥ 90
L₈₀ / 100000 h
initial MacAdam ≤ 3 SDCM


ELECTRICAL

phase-cut dim
220 - 240 V
system 7.8 W
Class 1

PHYSICAL

length 180 mm
width 180 mm
height 60 mm
0.73 kg

^a Colour may deviate slightly due to production conditions.




Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.98	0.98	0.97	0.97
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMFa	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMFa ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.